

Oxidative Stress TF Activation Profiling Plate Array

Catalog # FA-1005

(For Research Use Only)

Introduction

Oxidative Stress occurs when the steady-state balance between pro-oxidant and anti-oxidant is changed. Oxidative stress has been reported to be associated with many diseases such as cancer, Alzheimer's disease, Parkinson's disease, atherosclerosis, and heart failure. Responses to Oxidative Stress are mediated by a large number of transcription factors (TFs), including AP1, ATF4, CBF/NFY, EGR1, ETS, FOXO1, HIF, HSF, IRF, NFAT, NFkB, NRF2/ARE, p53, Smad, SRF and Stat3. Signosis, Inc. has developed the Oxidative Stress TF Activation Profiling Plate Array, which can be used to monitor 16 oxidative stress related TFs simultaneously.

Principle of the Assay

Signosis, Inc.'s TF Activation Profiling Plate Array is used for monitoring the activation of multiple TFs simultaneously. In this technology, a series of biotinlabeled probes are made based on the consensus sequences of TF DNA-binding sites. When the probe mix incubates with nuclear extracts, individual probes will find its corresponding TF and form TF/probe complexes, which can be easily separated from free probes through a spin column purification. The bound probes are detached from the complex and analyzed through hybridization with a plate; each well is specifically pre-coated with complementary sequences of the probes. The captured DNA probe is further Streptavidin-HRP with Luminescence is reported as relative light units (RLUs) on a microplate luminometer.

Materials Required but Not Provided

- Nuclear Extraction Kit from Signosis (SK-0001)
- PCR machine and PCR tubes
- Microcentrifuge working at 4 °C
- Hybridization incubator at 42°C
- Plate-Shaker
- Plate reader for luminescent detection
- ddH2O (DNAase-free)
- 8 and 12 Multi-channel pipettes

Materials Provided with the Kit

Component	Qty	Store at
96-Well Plate (with aluminum	1	RT
adhesive seal)		
Isolation Columns	6	RT
Elution Buffer	600 µl	RT
TF Plate Hybridization Buffer	20 ml	RT
5X Plate Hybridization Wash	30 ml	RT
Buffer		
5X Detection Wash Buffer	40 ml	RT
Blocking Buffer	30 ml	RT
Filter Wash Buffer	15 ml	4°C
Filter Binding Buffer	1.5 ml	4°C
Substrate A	1 ml	4°C
Substrate B	1 ml	4°C
Streptavidin-HRP Conjugate	20 µl	4°C
Substrate Dilution Buffer	8 ml	4°C
TF Binding Buffer Mix	90 µl	-20°C
TF Oxidative Stress Probe	20 µl	-20°C
Mix		

Before Starting the Experiment Prepare the Following:

- Place Filter Binding Buffer and Filter Wash Buffer on ice so they are chilled for the assay (for at least 10 minutes).
- 2. Warm up *TF Plate Hybridization Buffer* and *Hybridization Wash Buffer* **42**°C before use.
- 3. Aliquot **200** μl of ddH₂O in a 1.5 ml microcentrifuge tube (per sample; 3 samples would be 600 μl ddH₂O) on ice so that it is chilled for the assay (for at least **10 minutes**).
- 4. Dilute **30 ml** of *5X Plate Hybridization Wash Buffer* with **120 ml** of ddH2O before use.
- 5. Dilute **40 ml** of *5X Detection Wash Buffer* with **160 ml** of ddH2O before use.
- 6. Dilute **20 µl** *Streptavidin-HRP* in **10 ml** Blocking Buffer (1:500 dilution).



Please Read the Assay Procedure Before You Begin

Assay Procedure

TF/ DNA Complex Formation

 Mix the following components for each reaction in a tube

15 µl TF Binding Buffer Mix

3 µl TF Probe mix

 $X \mu l$ Nuclear Extract (5 μg -15 μg recommended)

Y μl ddH2O (add up to final volume)

30 µl Reaction Mix


2. Incubate the **Reaction Mix** at room temperature (20-23°C) for **30 minutes**.

Separation of TF DNA Complex from Free Probes

- 3. Equilibrate an *Isolation Column* by adding **200 μl** pre-chilled *Filter Binding Buffer*. Centrifuge the column with the collection tube at **6,000rpm** for **1 minute** in a microcentrifuge at room temperature.
- 4. Transfer the **30 μl Reaction Mix** directly onto the filter in the center of the *Isolation Column* (avoiding bubbles).
- Incubate on ice for 30 minutes. DO NOT incubate longer than 30 minutes; this will result in high background.
- Add 500 µl pre-chilled Filter Wash Buffer to the Isolation Column and incubate for 3 minutes on ice.
- Centrifuge the *Isolation Column* with the collection tube at 6,000 rpm for 1 minute in a microcentrifuge at 4°C. Discard the flow through from the collection tube.
- 8. Wash the column by adding **500** µl pre-chilled *Filter Wash Buffer* to the *Isolation Column* on ice.
- Centrifuge the *Isolation Column* with the collection tube for 1 minute at 6,000rpm in a microcentrifuge at 4°C. Then discard the flow through.
- 10. Repeat steps 8-9 for an additional **3 times** for a total a 4 washes.

Elution of Bound Probe

- 11. Add **50 μl** of *Elution Buffer* onto the center of *Isolation Column*, and incubate at room temperature for **5 minutes**.
- Place the *Isolation Column* on a new 1.5 ml microcentrifuge tube and centrifuge at 10,000 rpm for 2 minutes at room temperature.
- 13. If you have yet to do so, chill **200** μl ddH2O (DNAase free) in a 1.5 ml microcentrifuge tube on ice for at least **10 minutes**, and **keep on ice**.
- 14. Transfer the eluted probe to a PCR tube and denature the eluted probes at 98°C for 5 minutes.
- 15. Immediately transfer the denatured probes to the chilled ddH2O from Step 13 and place on ice. The samples are ready for the hybridization phase of the assay. You can store the sample at -20°C for future use. If you decided to store your

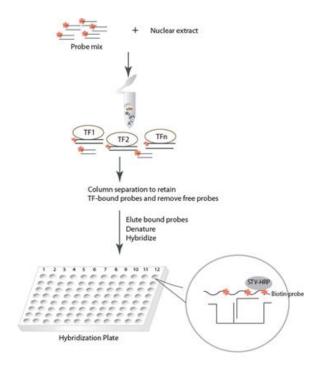

sample, go to **step 16**. before proceeding to the hybridization phase.

- 16. Skip this step if you did not freeze your sample for future use.
- A) Thaw your sample back to an aqueous phase at room temperature.
- B) Redistribute the sample into PCR tubes to be reheated at **98**°C for **5 minutes**.
- C) Afterwards, **immediately** place the PCR tubes on ice.
- D) You may now proceed to Step 17.

Hybridization of Eluted Probe with Hybridization

- 17. Remove the clear adhesive film sealing from the provided *96-Well Plate*.
- 18. Aliquot **2** ml pre-warmed *TF Plate Hybridization Buffer* to a dispensing reservoir (DNase free) and then add **200** µl denatured probes. Mix them together by gently shaking the reservoir.
- 19. Using a 8 multi-channel pipette **100** µl of the mixture from step 18. into the corresponding wells with 8 multi-channel pipette immediately.

Note: the 96-Well Plate is divided into 6 sections of two columns each for 6 samples. Two columns are used per sample. If you wish to have a blank to compare your wells against, select one TF you are not interested in and determine its location on the plate by using the diagram on the third page. Add 100 µl TF Plate Hybridization Buffer only without the eluted probe.

20. Firmly seal the wells with the aluminum adhesive seal to secure well contents. Press the foil over the letters and numbers on the plate to help orient well designations. Hybridize the well contents to the plate by placing the 96-Well Plate in an incubator set at 42°C overnight.

Detection of Bound Probe

- Remove the aluminum adhesive seal from the experimental wells with a razor blade. Keep the unused wells sealed.
- 22. Invert the *96-Well Plate* over an appropriate container and expel the contents forcibly.
- 23. Wash the plate by adding 200 μl of prewarmed IX Plate Hybridization Wash Buffer to each well by row with a 12 multichannel pipette. Incubate the plate for 5 minutes with gentle shaking at room temperature on a plate-shaker. Completely remove at end of 5 minutes by tapping the plate against clean paper towels.
- Repeat step 23. two more times for a total of three washes.
- 25. Add **200** µl of *Blocking Buffer* to each well by row with a **12 multi-channel pipette** and incubate for **5 minutes** at room temperature with gentle shaking on a plate-shaker.
- Invert the plate over an appropriate container to forcibly remove *Blocking Buffer* from the wells.
- If you have yet to do so: add 20 μl of Streptavidin-HRP Conjugate in 10 ml Blocking Buffer (1:500 dilution), enough for the whole plate (6 sections). This is the diluted Streptavidin-HRP Conjugate

- 28. Add 95 μl of diluted Streptavidin-HRP Conjugate to each well by row with a 12 multi-channel pipette and incubate for 45 minutes at room temperature on a plate-shaker with gentle shaking.
- 29. After the **45 minutes** have elapsed, forcibly remove the *96-Well Plate* contents in an appropriate container. Complete removal of liquid at each wash by firmly tapping the plate against clean paper towels.
- 30. Wash the 96-Well Plate by adding 200 µl IX

 Detection Wash Buffer to each well by row
 with a 12 multi-channel pipette. Incubate
 the plate for 5 minutes with gentle shaking
 on a plate-shaker at room temperature.
 Decant the liquid from the wells.
- 31. Repeat step 30. for a total of 3 washes. At the last wash, invert plate on clean paper towels for **1 minute** to remove excessive liquid.
- 32. Freshly prepare the *Substrate Solution* in the following ratio:

1 part Substrate A / 1 part Substrate B / 8 parts Substrate Dilution Buffer.

For example, for the entire 96-Well Plate:

1 ml Substrate A
1 ml Substrate B
8 ml Substrate Dilution Buffer
10 ml Substrate Solution

- 33. Add **95** μl *Substrate Solution* to each well by **row** with a **12 multi-channel pipette** and incubate the solution in the wells for **1** minute at room temperature.
- 34. Place the plate in the luminometer. Allow plate to sit inside machine for **4 minutes** before reading. Set integration time to **1 second** with no filter position. For the best results, read the plate within **5-20 minutes**.

Oxidative Stress TF Activation Profiling Array Diagram

Oxidative Stress II Retivation I forming fiftay Diagram												
	1	2	3	4	5	6	7	8	9	10	11	12
Α	AP1	IRF										
В	ATF4	NFAT										
С	CBF/NFY	NFkB										
D	EGR1	NRF2/ARE										
E	ETS	P53										
F	FOXO1	Smad										
G	HIF	SRF										
Н	HSF	Stat3										

Related Products				
Catalog #	Product Description			
FA-1001	TF Activation Profiling Plate Array I			
FA-1002	TF Activation Profiling Plate Array II			
FA-1003	Stem Cell TF Activation Profiling Plate Array			
FA-1004	Cancer Stem Cell TF Activation Profiling Plate Array			
FA-1006	ER (UPR) Stress TF Activation Profiling Plate Array			